



# TECHNICAL BULLETIN HIGH PRESSURE SODIUM LAMP

## Hortilux Ultra Ace™ EN NH360/HTL/EN

ANSI Code: Use with ballast rated for ANSI M59 lamp

Product Code: 62550

**Features:**



- Converts Mercury / Metal Halide to HPS by simply changing the lamp
- EPA TCLP compliant for non-hazardous waste Lead Free



*Environmentally Friendly-*  
Reduced Mercury and 100% lead free!

### PERFORMANCE DATA

Initial lumens at rated watts after 100 hours operation	45000	lm
Mean lumens at 10 hours/start	40500	lm
Rated average life	24000	h
Warm up time (90% lumens)	5	min
Correlated color temperature	2100	K
CIE chromaticity	0.532, 0.422	x, y
Color rendering index	25	
Operating Position	Universal	
Time to hot re-start	15 max.	min

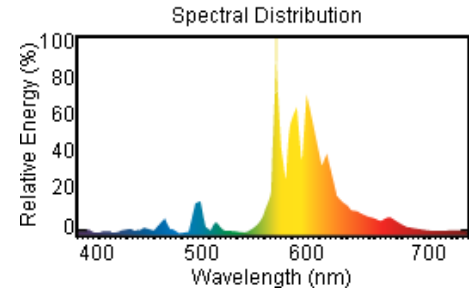


### ELECTRICAL CHARACTERISTICS

Nominal lamp wattage	360	W
Nominal lamp voltage	135	V
Nominal lamp current	3.25	Arms
Current crest factor	1.8 max.	
Max. starting current	5.0	Arms
<b>Ballast requirements</b>		
Min. rms starting voltage	198	V <sub>rms</sub>
Min. peak starting voltage	280	V <sub>peak</sub>
Lamp holder rating	2	kV


### PHYSICAL DESCRIPTION

Maximum overall length	291 (11.45)	mm (in)
Light center length	178 (7.0)	mm (in)
Bulb diameter	117 (4.63)	mm (in)
Base to bulb eccentricity (max)	3	deg
Maximum base temperature	210 (410)	°C (°F)
Maximum bulb temperature	400 (752)	°C (°F)
Bulb designation	BT37	
Bulb material	Borosilicate (Hard Glass)	
Arc tube material	Alumina	
Bulb finish	Clear	
Base designation	E39 Mogul	
EPA TCLP Compliant / Lead Free	Yes	

### LAMP MORTALITY

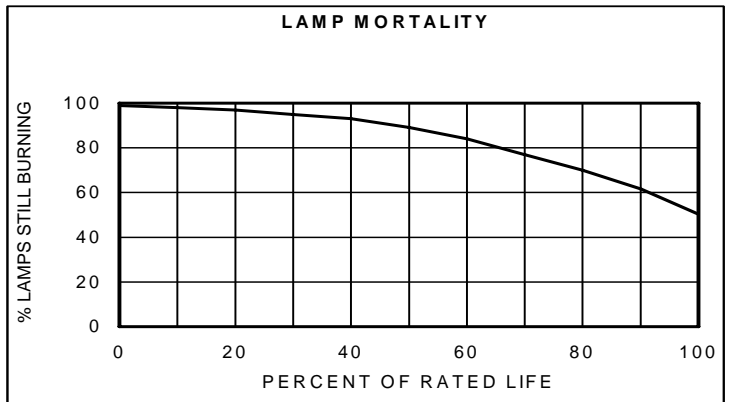

### LUMEN MAINTENANCE

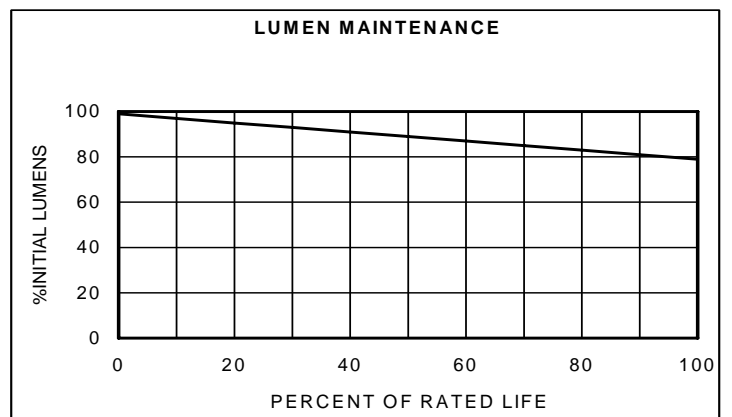

ISO 9001:2000 Certified



**EYE LIGHTING INTERNATIONAL  
OF NORTH AMERICA, INC.**  
A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

Address: 9150 Hendricks Rd., Mentor, OH 44060  
Phone: 888-665-2677 Fax: 800-811-7395 E-Mail: [sales@eyehortilux.com](mailto:sales@eyehortilux.com)  
Phone: (440) 350-7000 Fax: (440) 350-7001 Web: [www.eyehortilux.com](http://www.eyehortilux.com)



**⚠ WARNING**

**RISK OF ELECTRIC SHOCK:**

- Turn power off before inspection, installation or removal.
- Protect lamp from direct contact with liquids to avoid breakage from thermal shock.

**RISK OF FIRE:**

- Keep combustible materials away from lamp during operation.

**UNEXPECTED LAMP RUPTURE MAY CAUSE INJURY, FIRE OR PROPERTY DAMAGE**

- Do not exceed rated ballast voltage.
- Do not use lamp if outer glass is scratched or broken.
- Do not use beyond rated life.
- Do not turn on lamp until fully installed.
- Use only with fixture and ballast rated for this product.
- Electrically insulate any metal to glass support in fixture.

**⚠ CAUTION**

**RISK OF BURN:**

- Allow lamp to cool before handling.
- Contains sodium – Avoid skin contact with broken pieces.

**LAMP MAY SHATTER AND CAUSE INJURY IF BROKEN**

- Do not use excessive force when installing lamp.
- Dispose of lamp in an enclosed container.
- Wear safety glasses and gloves when installing lamp.

**Hg-LAMP CONTAINS MERCURY**

Manage in Accord with Disposal Laws

See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-888-665-2677

ISO 9001:2000 Certified



**EYE LIGHTING INTERNATIONAL**  
**OF NORTH AMERICA, INC.**  
A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

Address: 9150 Hendricks Rd., Mentor, OH 44060  
Phone: 888-665-2677 Fax: 800-811-7395 E-Mail: [sales@eyehortilux.com](mailto:sales@eyehortilux.com)  
Phone: (440) 350-7000 Fax: (440) 350-7001 Web: [www.eyehortilux.com](http://www.eyehortilux.com)