



LIMITED WARRANTY; Limited Liability and Limited Remedy

IMPORTANT

Except as stated below the user assumes all risk and liability associated with the purchase and use of HazardGuard® products. Before using this product, you must read the accompanying Instruction Sheet (attached or on the reverse side) and determine if this product is suitable for your intended application.

This product will be free from defects in material and manufacturing for one (1) year from the date of purchase. HazardGuard MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Except where prohibited by state law, HazardGuard will not be liable for damage, personal injury or loss arising out of the use or installation of this product, whether direct, indirect, incidental, special or consequential regardless of legal assertion.

If this product is defective within the warranty period stated above and not the result of improper use, exposure to sunlight, or excess heat, your exclusive remedy shall be at HazardGuard’s option to replace the product or refund the purchase price of the HazardGuard product. A nominal S&H fee will apply. [See website for further details.]

WARNING



Contact with electricity can cause serious injury or death! Improperly installed wire and cable can also be a source of dangerous fires. Before using this product on any flexible cord, it is highly recommended that you carefully unplug the cord set and/or turn-off power to that circuit at the circuit breaker or fuse panel. Consult a qualified electrician if you need assistance.

Keep out of reach of Children!

MAX. OPERATING TEMPERATURE

This product should NOT be used where temperatures may exceed 150F (66C).

CUSTOM PRODUCT ORDERS

HazardGuard® products are available in custom:

- ❖ Colors (Cold and Hot)
- ❖ Temperatures (color-change settings 20F to 160F)
- ❖ Polymers (and additives)
- ❖ Sizes (from micro to power cable size)
- ❖ Shapes (extruded or molded)

CONTACT INFORMATION

HazardGuard Safety Wire, Inc
300 Hardy Dr
Pittsburgh, Pa 15241

412 835-6312 (office)
412 833-3012 (fax)
www.hazardguard.com

HazardGuard®/ Patent and Pat. Pending/Copyright © 3/1/10
Independently Tested
Manufactured and Printed in the USA

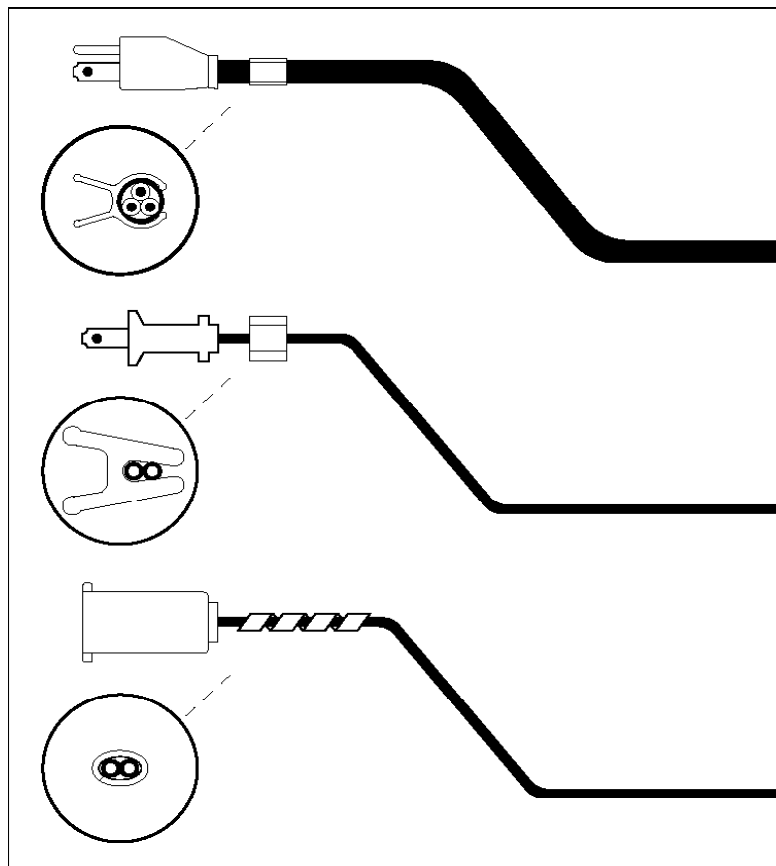


ILLUSTRATION (Example attachment locations)

Top showing Round Clip on male plug-end


Middle showing Flat Clip on male plug-end

Bottom showing Spiral Wrap on female plug-end

TIPS: Chameleon clips & wraps can be applied adjacent to either male or female plug ends. The spiral wrap can be applied to either a round or flat style cord. Also be sure to replace (recycle) Chameleon clips & wraps every 3 yrs, or earlier if any substantial fading of colors occur.



Conserving Energy!

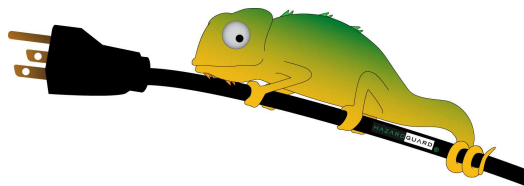

(PLEASE SEE OTHER SIDE OF INSTRUCTION SHEET)