


# All System™ Cord Set



The All System™ Cord Set is designed to position the bulb in the center of your reflector for optimum performance. Please follow the guidelines below to achieve the proper mounting position.

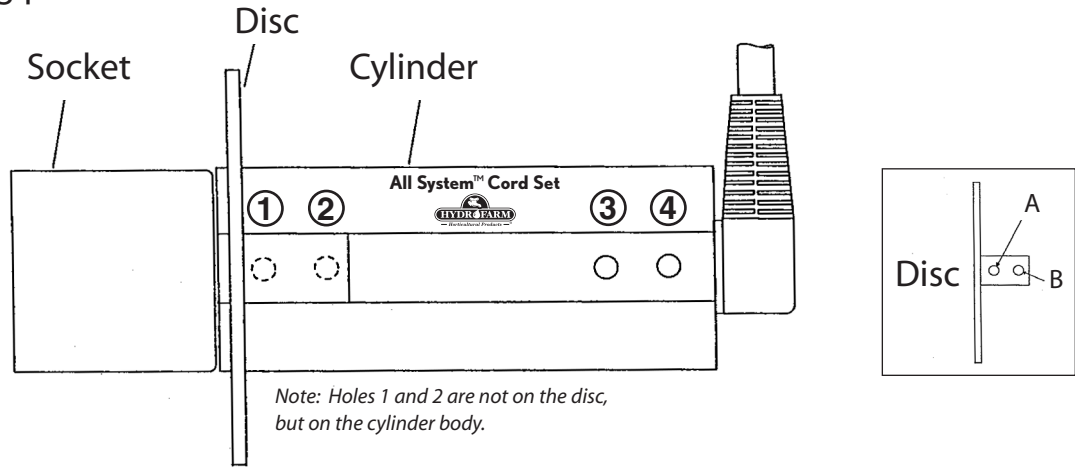

1. Identify your reflector and bulb type using the charts below.
2. Slide disc to the proper cylinder location for your reflector bulb combination, making sure that you have lined up the proper disc hole (A or B) with the correct cylinder hole (1, 2, 3 or 4).
3. Insert provided screws into the proper disc hole (A or B) and thread screw into correct cylinder hole (1, 2, 3, or 4). Tighten with screwdriver until snug.
4. Insert socket assembly into reflector or bracket hole (Pro) and fasten with the 10/24 screws that are provided in the hanger hardware kit.

## REFLECTOR TYPES

### Radiant Reflector

| Bulb Type                  | Cylinder Hole | Disc Hole |
|----------------------------|---------------|-----------|
| Halide 400W / 1000W — BT37 | 3             | B         |
| Sodium 1000W               | 1             | A         |
| Halide 1000W — T30         | 1             | A         |
| Sodium 600W                | 3             | B         |
| Sodium 430W                | 3             | B         |
| Sodium 400W                | 3             | A         |
| Son Agro 430W              | 4             | B         |

### Super Grow Wing Reflector

| Bulb Type                  | Cylinder Hole | Disc Hole |
|----------------------------|---------------|-----------|
| Halide 400W / 1000W — BT37 | 2             | B         |
| Sodium 1000W               | 1             | B         |
| Halide 1000W — T30         | 1             | B         |
| Sodium 600W                | 2             | A         |
| Sodium 430W                | 2             | A         |
| Sodium 400W                | 2             | B         |
| Son Agro 430W              | 2             | A         |

### GLX Reflector

| Bulb Type                  | Cylinder Hole | Disc Hole |
|----------------------------|---------------|-----------|
| Halide 400W / 1000W — BT37 | 2             | B         |
| Sodium 1000W               | 1             | B         |
| Halide 1000W — T30         | 1             | B         |
| Sodium 600W                | 2             | A         |
| Sodium 430W                | 2             | A         |
| Sodium 400W                | 2             | B         |
| Son Agro 430W              | 2             | A         |

### Pro Reflector / Bracket

| Bulb Type                  | Cylinder Hole | Disc Hole |
|----------------------------|---------------|-----------|
| Halide 400W / 1000W — BT37 | 4             | B         |
| Sodium 1000W               | 2             | A         |
| Halide 1000W — T30         | 2             | A         |
| Sodium 600W                | 3             | B         |
| Sodium 430W                | 3             | A         |
| Sodium 400W                | 3             | A         |
| Son Agro 430W              | 4             | B         |