

Hydrofarm T5 Commercial Fixture Instructions

1. Carefully remove components from box and protective foam and ensure that your Hydrofarm T5 Fixture box includes the following:
 - a. One T5 lamp fixture.
 - b. Two hanging hooks.
 - c. The appropriate quantity of T5 bulbs (4, 6, or 8).
2. Inspect the included components for any damage, missing parts, or other concerns. Contact your store in order to get a replacement or new part if required.
3. If there is a protective film on the reflector surfaces, be sure to remove it completely prior to installing the bulbs.
4. Before installing the T5 fluorescent tubes, remove cardboard and inspect each socket end on the fixture to be sure it is ready to receive the pins on the tube ends. Gently align the pins vertically upon inserting in each socket and once all the way down, gently rotate to seat the pins into a horizontal orientation. You should feel a small bump upon proper location.
5. To hang in the orientation desired, utilize the appropriate holes and slots with the hanging hooks.
 - a. For overhead hanging, use the holes and slots at the center on each end. For vertical hanging use only one of the hooks with the center end hole and slot set. *See figure 1.*
 - b. For horizontal hanging, utilize the holes and slots at the corners on each end. *See figure 2.*



Figure 1

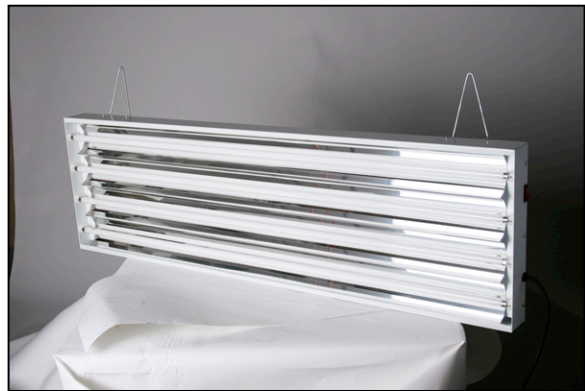


Figure 2

6. Hydrofarm T5 Commercial Fixtures are intended for 120v/60Hz use only.